




ТЕЛЕКОМПАНИЯ
Черноморье

ОСОБЕННОСТИ НАСТРОЙКИ РОУТЕРА


ДЛЯ ПРОСМОТРА IP TV

D-LINK DIR-300

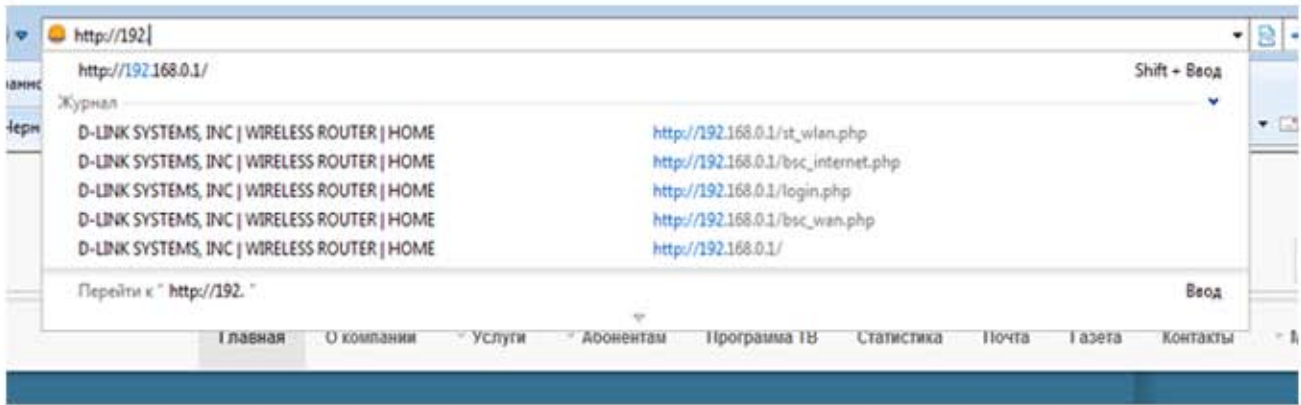

Заходим на страничку управления роутером. Для этого в строке браузера необходимо набрать **HTTP://xxx.xxx.xxx.xxx** - IP адрес роутера (по умолчанию **192.168.0.1**). Ввести логин и пароль (по умолчанию Login **Admin**, пароль **отсутствует**)

2

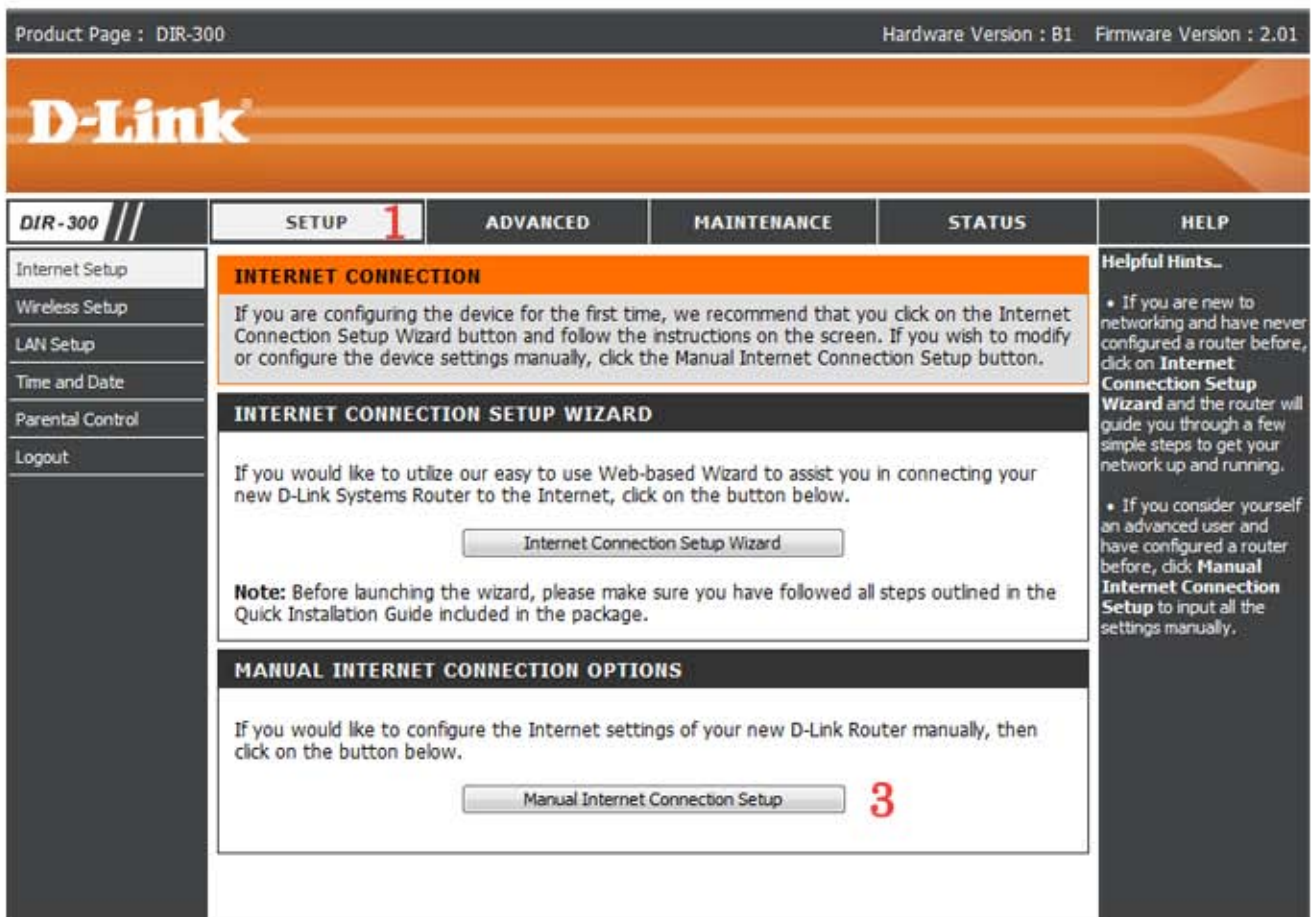

Далее выбираем раздел
Setup /1/
Internet Setup /2/
Manual Internet Connection Setup /3/

Перед внесением изменений убедитесь в том, что вы знаете свой логин и пароль выданный Вам провайдером для авторизации в сети.

INTERNET CONNECTION TYPE

Choose the mode to be used by the router to connect to the Internet.

My Internet Connection is : **1**

RUSSIA PPPOE (DUAL ACCESS)

Enter the information provided by your Internet Service Provider (ISP).

Dynamic PPPoE Static PPPoE

User Name : MPPE :

Password : **2**

Confirm Password :

Service Name : (optional)

IP Address :

MAC Address : - - - - - (optional)

Receive DNS from ISP Enter DNS Manually

Primary DNS Address :

Secondary DNS Address : (optional)

Maximum Idle Time : Minutes

MTU :

Connect mode select : Always Manual Connect-on demand

WAN PHYSICAL SETTINGS

3 Dynamic IP Static IP

IP Address :

Subnet Mask :

Gateway : (optional)

Primary DNS Address : (optional)

Secondary DNS Address : (optional)

В списке My Internet Connection **/1/** следует выбрать позицию Russia PPPoE Dual Access.

В разделе настройки **/2/** ставим галочку на **Dynimic PPPoE**. Заполняем поля логин, пароль и мак адрес. Мак-адрес должен соответствовать адресу заявленном при подключении (скорее всего адрес соответствует адресу компьютера и получить его можно нажав кнопку **Clone Mac-Adress**)

В разделе **WAN PHYSICAL SETTINGS /3/** все поля оставляем пустыми и ставим галочку на **DYNAMIC IP**

Сохраняем все действия

DIR-300	SETUP	1 ADVANCED	MAINTENANCE	STATUS	HELP
Port Forwarding	ADVANCED NETWORK SETTINGS				Helpful Hints.. <ul style="list-style-type: none">• For added security, it is recommended that you disable the WAN Ping Respond option. Ping is often used by malicious Internet users to locate active networks or PCs.• If you are having trouble receiving video on demand type of service from the Internet, make sure the Multicast Stream option is enabled.
Application Rules	These options are for users that wish to change the LAN settings. We do not recommend changing these settings from factory default. Changing these settings may affect the behavior of your network.				
QoS Engine	<input type="button" value="Save Settings"/> <input type="button" value="Don't Save Settings"/>				
MAC Filter	UPNP				
Firewall & DMZ	Universal Plug and Play (UPnP) supports peer-to-peer Plug and Play functionality for network devices.				
Advanced Wireless	Enable UPnP : <input checked="" type="checkbox"/>				
2 Advanced Network	WAN PING				
Routing	If you enable this feature, the WAN port of your router will respond to ping requests from the Internet that are sent to the WAN IP Address.				
Logout	Enable WAN Ping Respose : <input type="checkbox"/>				
	WAN PORT SPEED				
	10/100Mbps Auto ▾				
	MULTICAST STREAMS				
	Enable Multicast Streams : <input checked="" type="checkbox"/> 3				
	Wireless Enhance Mode : <input checked="" type="checkbox"/>				

Далее выбираем раздел

Advanced /1/

Advanced Network /2/

Отмечаем галочками позиции /3/

Сохраняем все действия